




Series: 20210 Type: 1451

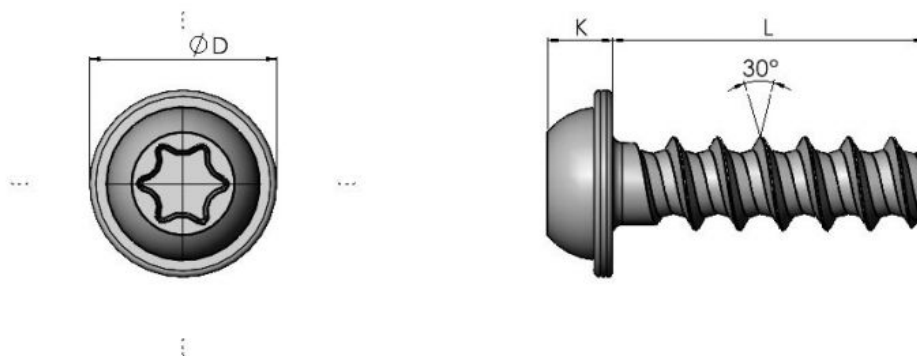

## Polyplast 30 Torx Flange

Part No.	Thread	D	K	Recess
1451K22**6	2.2	4.50	1.40	T6
1451K25**6	2.5	5.00	1.50	T6
1451K30**6	3	6.00	2.10	T10
1451K35**6	3.5	7.00	2.40	T10
1451K40**6	4	8.00	2.60	T20
1451K50**6	5	10.00	3.30	T20
1451K60**6	6	12.00	3.60	T25


	Legend
*	Usually Available from Stock
**	Non-preferred (Possible Lead Times)
***	Special Order Only

Thread/Length	5	6	8	10	12	14	16	18	20	25	30
2.2	**	**	**	***	***	***	***	***	***	***	***
2.5	***	*	*	*	***	***	***	***	***	***	***
3	***	*	*	*	*	*	*	*	*	*	***
3.5	***	***	*	*	*	*	*	*	*	*	***
4	***	***	*	*	*	*	*	*	*	*	*
5	***	***	*	*	*	*	*	*	*	*	*
6	***	***	***	***	*	*	*	*	*	*	*



Continued from previous page...

Series: 20210 Type: 1451

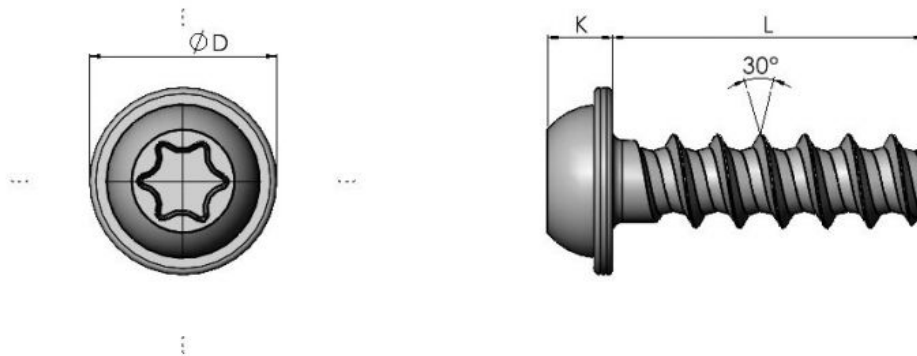

These screws are designed specifically for screwing directly into plastic materials with the following advantages.

30 degree flank angle reduces radial forces and hoop stress. Recessed core diameter increases thread engagement. The thread forming action flows material around the thread reducing stripping. Up to 10x reusability without loss of performance. High shear loads and pull out force.

Material: Steel, Stainless Steel A2 (Selected Sizes Only)

Finish: Zinc Plated, Self Colour

For the part number replace \*\* with the desired length found in the table:

---

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**