
Tel: 01246 296 930 • Fax: 01246 296 940 Email: fasteners@harrisonsilverdale.co.uk Internet: http://www.harrisonsilverdale.co.uk



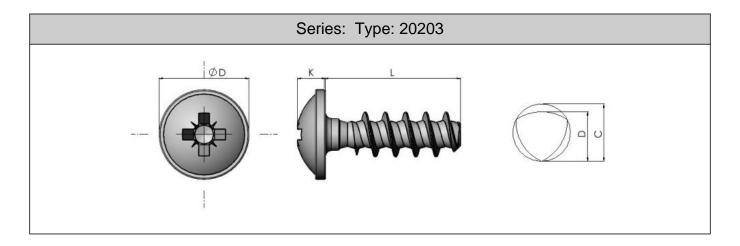

## Plas-Tight 45° Pozi Flange Head

Part No.	Thread	D1	K	Recess	
20203 35**	3.5	6.60	1.60	1	
20203 40**	4	8.00	2.00	2	
20203 50**	5	9.60	2.30	2	
20203 60**	6	12.00	2.90	2	

	Legend
*	Usually Available from Stock
**	Non-preferred (Possible Lead Times)
***	Special Order Only

Thread/Length	4	5	6	7	8	10	12	16	20	25	30	35
3.5	***	***	**	***	**	*	*	**	**	**	***	***
4	***	***	**	***	*	**	**	*	*	*	***	***
5	***	***	***	***	***	*	*	*	*	*	***	***
6	***	***	***	***	***	***	***	**	**	**	***	***

Plas-Tight 45° Screws are a Metric 3-Lobe Bodied Screw that encompass a 45º thread profile which allows deep thread penetration into the plastic material. The 3-lobe body allows displaced material to cold flow back into relief areas which minimises radial stress and reduces the possibility of failure.

Material: Steel, Stainless Steel A2 (Selected Sizes Only)

Finish: Zinc Plated, Self Colour

For the part number replace \*\* with the required length found in the tables below: