




Series: 30102 Type: MRB

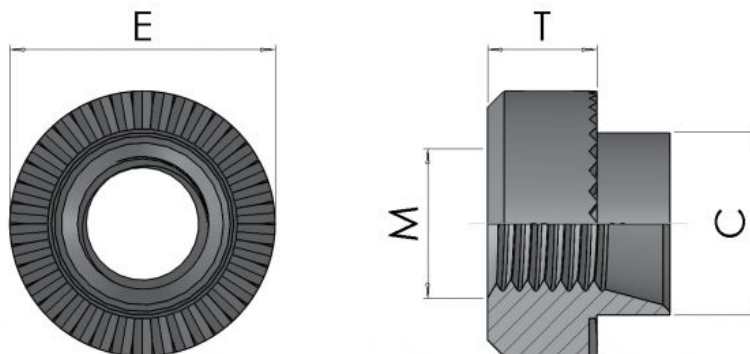

Mini Rivet Bushes


| Part No. | Thread M | Hole Size+0.5-0 | O/D E +/- 0.13 | Body T+/-0.13 | Skirt C/+0-0.13 |
|----------|----------|-----------------|----------------|---------------|-----------------|
| M25??RSH | M2.5 | 4.19 | 5.50 | 2.80 | 4.19 |
| M3??RSH | M3 | 4.19 | 5.50 | 2.80 | 4.19 |
| M35??RSH | M3.5 | 5.41 | 7.00 | 3.20 | 5.41 |
| M4??RSH | M4 | 5.41 | 7.00 | 3.20 | 5.41 |
| M5??RSH | M5 | 6.40 | 8.50 | 3.80 | 6.40 |
| M6??RSH | M6 | 7.70 | 10.00 | 5.10 | 7.70 |
| M8??RSH | M8 | 9.70 | 12.00 | 6.50 | 9.70 |

| Legend | |
|--------|-------------------------------------|
| * | Usually Available from Stock |
| ** | Non-preferred (Possible Lead Times) |
| *** | Special Order Only |

| SWG/MM | M2.5 | M3 | M3.5 | M4 | M5 | M6 | M8 |
|---------|------|-----|------|-----|-----|-----|-----|
| 8G/4.0 | *** | *** | *** | *** | *** | *** | *** |
| 10G/3.0 | *** | ** | ** | ** | ** | ** | * |
| 12G/2.5 | * | ** | ** | * | * | * | * |
| 14G/2.0 | * | * | ** | * | * | * | * |
| 16G/1.6 | * | * | * | * | * | * | * |
| 18G/1.2 | * | * | * | * | * | * | ** |
| 20G/1.0 | * | * | * | * | * | * | ** |
| 22G/0.8 | * | * | *** | * | *** | *** | *** |



Continued from previous page...

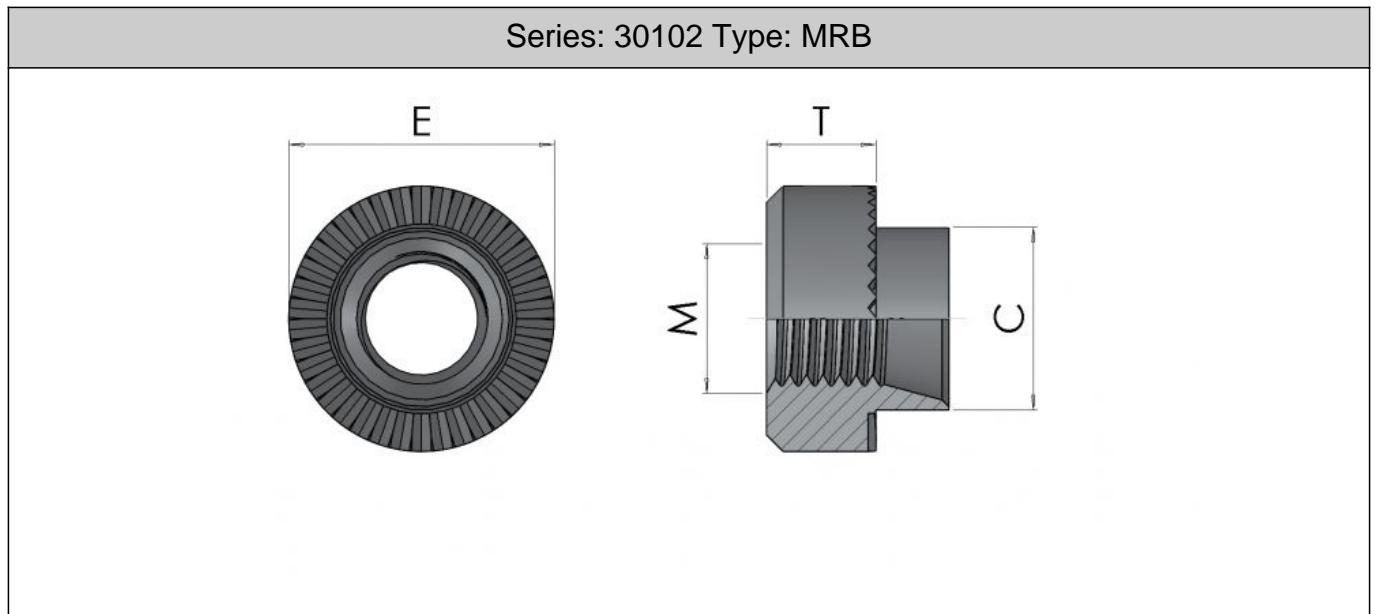

Mini Rivet Bushes

Mini Rivet Bushes have the same features as the 30101 series standard parts but with a smaller body to allow them to be placed closer to the edge of the panel. They provide a strong female thread in sheet metal applications. The spigot is placed through a pre-punched hole and riveted on the reverse side, the serrations under the head provide excellent torque resistance. Various spigot lengths are available for different sheet thicknesses.

Materials & Finishes:-Steel Solf Colour (Code 2)Steel Trivalent Zinc (Code 26)303 Stainless Steel (Code SS)

To Specify use Series Code/Part No/Gauge Size/Finish Code (eg 30102 M320RSH26)

Gauge sizes to suit material thickness

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples