




Series: 30105 Type: SOFF

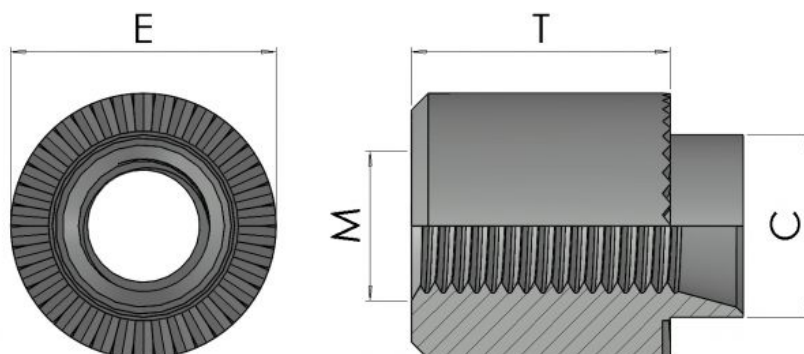

## Rivet Bush Standoffs

Part No.	Thread	Hole Size+0.5-0	Sheet Thickness	Sheet Gauge	O/D E +/- 0.13	Body T+/-0.13	Skirt C/+0-0.13
M25??SH	M2.5	5.54	0.7/4.0	22-08SWG	7.92	AS REQUIRED	5.54
M3??RSH	M3	5.54	0.7/4.0	22-08SWG	7.92	AS REQUIRED	5.54
M35??RSH	M3.5	6.73	0.7/4.0	22-08SWG	9.52	AS REQUIRED	6.73
M4??RSH	M4	6.73	0.7/4.0	22-08SWG	9.52	AS REQUIRED	6.73
M5??RSH	M5	7.92	0.7/4.0	22-08SWG	11.10	AS REQUIRED	7.92
M6??RSH	M6	9.52	0.7/4.0	22-08SWG	12.70	AS REQUIRED	9.52
M8??RSH	M8	12.70	0.7/4.0	22-08SWG	15.87	AS REQUIRED	12.70
M10??RSH	M10	15.87	0.7/4.0	22-08SWG	19.05	AS REQUIRED	15.87
M12??RSH	M12	19.05	0.7/4.0	22-08SWG	25.40	AS REQUIRED	19.05

Round Rivet Bush Standoffs work the same as the 30101 series but have longer bodies for mounting components at a specific distance from the panel. The spigot is placed through a pre-punched hole and riveted on the reverse side, the serrations under the head provide excellent torque resistance. Various spigot lengths are available for different sheet thicknesses.

Materials & Finishes:-Steel Self Colour (Code 2)Steel Trivalent Zinc (Code 26)303 Stainless Steel (Code SS)

To Specify Use: Series No/Part No/Gauge/Length/Finish Code (eg 30105

M32010RSH26)THESE PARTS ARE SPECIAL ORDER SUBJECT TO MOQ