




Series: 30302 Type: CN

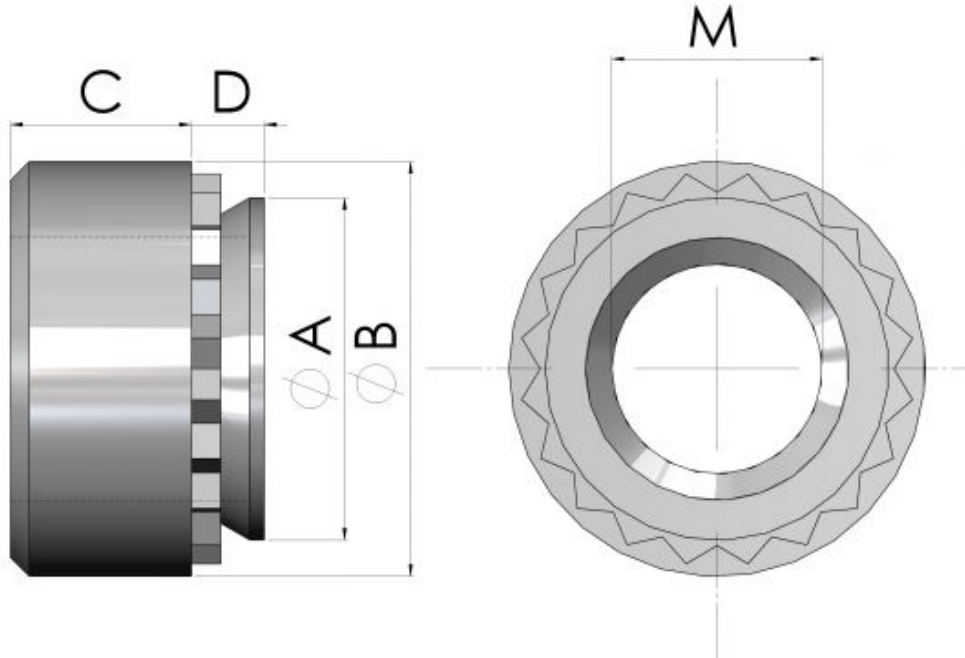


Self Clinch Nuts

Part No.	Thread M	Sheet Min E	Body Diam. B	Body Length C	Lead Diam. A	Shank Length D	Hole Size P	Min dim.X
M2-0	M2	0.8	6.30	1.50	4.22	0.76	4.25	5.0
M2-1	M2	1.0	6.30	1.50	4.22	0.97	4.25	5.0
M2-2	M2	1.4	6.30	1.50	4.22	1.37	4.25	5.0
M2.5-0	M2.5	0.8	6.30	1.50	4.22	0.76	4.25	5.0
M2.5-1	M2.5	1.0	6.30	1.50	4.22	0.97	4.25	5.0
M2.5-2	M2.5	1.4	6.30	1.50	4.22	1.37	4.25	5.0
M3-0	M3	0.8	6.30	1.50	4.22	0.76	4.25	5.0
M3-1	M3	1.0	6.30	1.50	4.22	0.97	4.25	5.0
M3-2	M3	1.4	6.30	1.50	4.22	1.37	4.25	5.0
M3 L-0	M3L	0.8	7.10	1.50	4.73	0.76	4.75	6.0
M3 L-1	M3L	1.0	7.10	1.50	4.73	0.97	4.75	6.0
M3 L-2	M3L	1.4	7.10	1.50	4.73	1.37	4.75	6.0
M3.5-0	M3.5	0.8	7.10	1.50	4.73	0.76	4.75	6.0
M3.5-1	M3.5	1.0	7.10	1.50	4.73	0.97	4.75	6.0
M3.5-2	M3.5	1.4	7.10	1.50	4.73	1.37	4.75	6.0
M4-0	M4	0.8	7.90	2.00	5.38	0.76	5.40	6.7
M4-1	M4	1.0	7.90	2.00	5.38	0.97	5.40	6.7

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples



Continued from previous page...

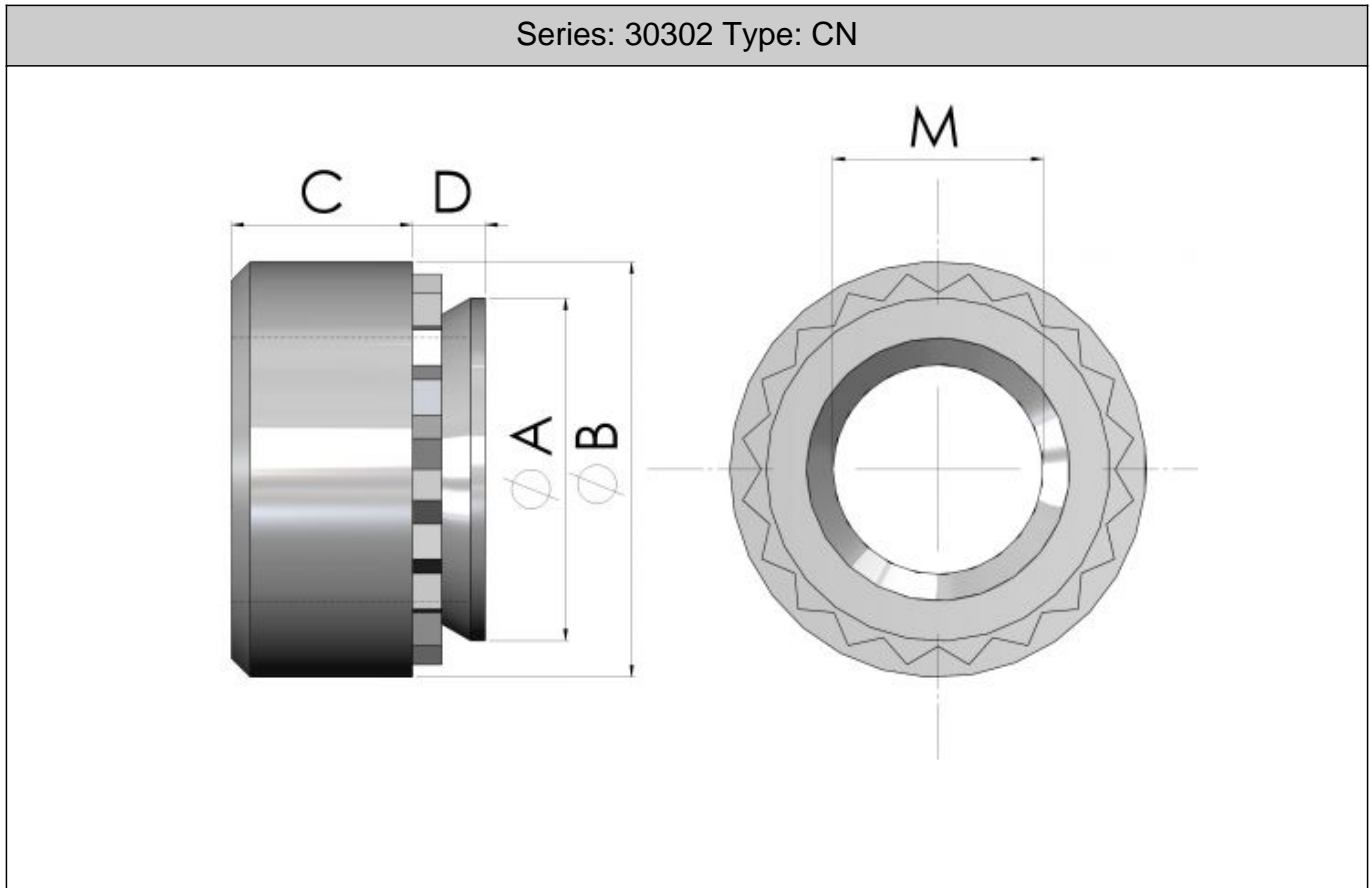


M4-2	M4	1.4	7.90	2.00	5.38	1.37	5.40	6.7
M5-0	M5	0.8	8.70	2.00	6.38	0.76	6.40	7.0
M5-1	M5	1.0	8.70	2.00	6.38	0.97	6.40	7.0
M5-2	M5	1.4	8.70	2.00	6.38	1.37	6.40	7.0
M6-1	M6	1.4	11.05	4.08	8.72	1.37	8.75	8.7
M6-2	M6	2.3	11.05	4.08	8.72	2.21	8.75	8.7
M8-1	M8	1.4	12.65	5.47	10.44	1.37	10.50	9.5
M8-2	M8	2.3	12.65	5.47	10.44	2.21	10.50	9.5
M10-1	M10	2.3	17.35	7.48	13.94	2.21	14.00	12.0
M10-2	M10	3.2	17.35	7.48	13.94	3.05	14.00	12.0
M10-3	M10	6.4	17.35	7.48	13.94	6.00	14.00	12.0

Self Clinch Nuts are a fast reliable method of providing captive female thread forms in sheet metal. The parts are squeezed into the sheet with a press whilst supporting the reverse side with an anvil. Typical applications include electrical enclosures used in the IT and telecom industries. They are for use in sheets of Rockwell Hardness of B - 85 max. Material: Heat

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples



Continued from previous page...

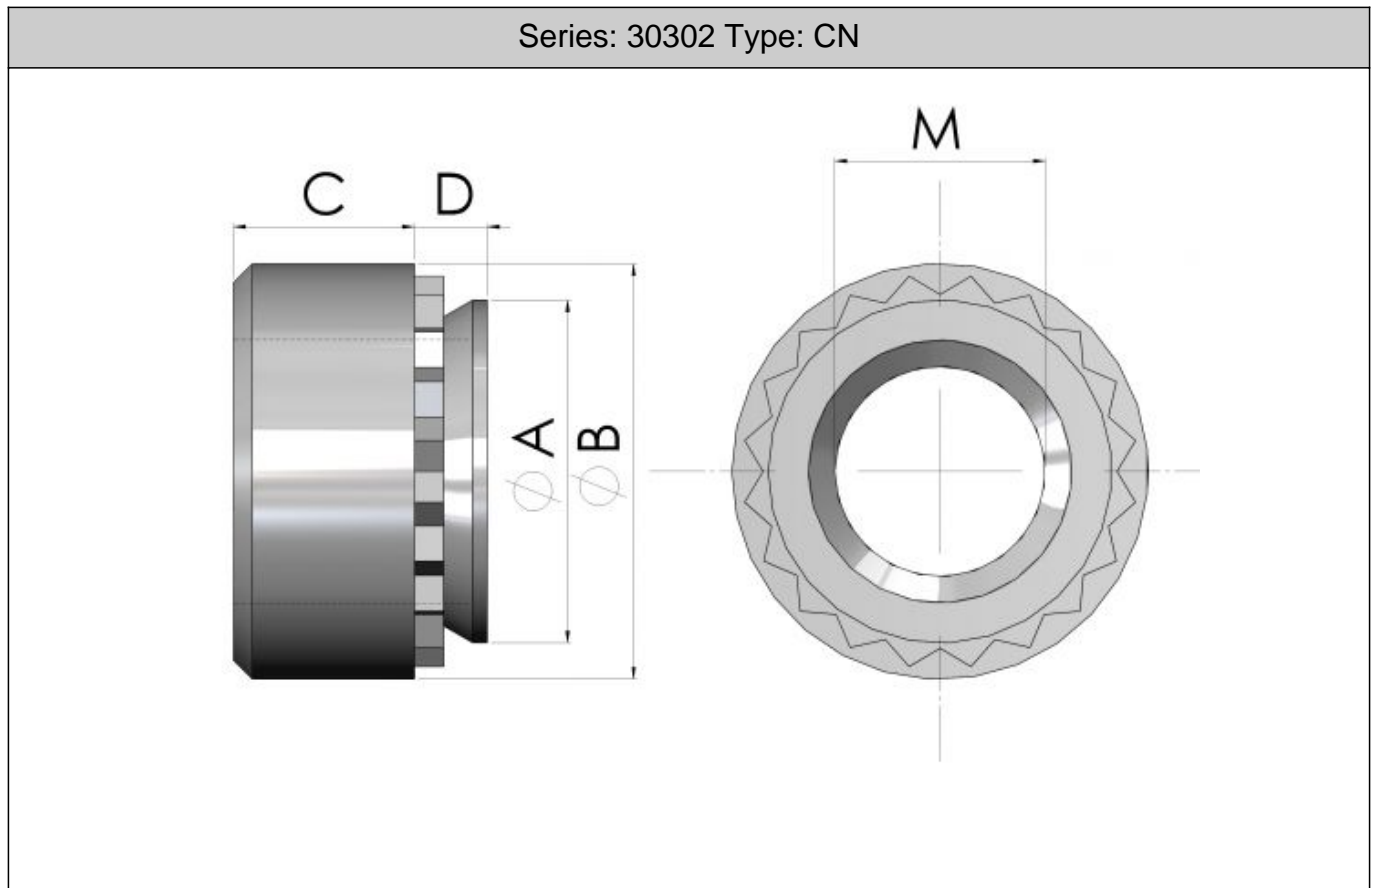

Treated Steel or Stainless Steel Finish: Trivalent Zinc

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples