




Series: 30313 Type: BS

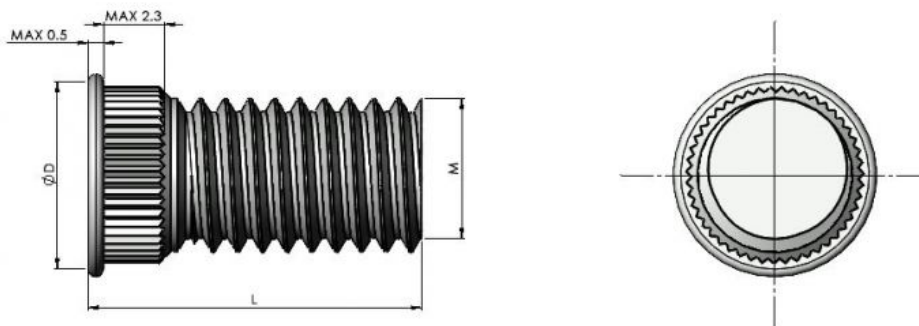

### Broaching Studs For PCB

Part No.	Thread M	Suitable Sheet	Head Diam. D	Hole Size	Max Clearance	Min dim. X	Anvil Hole	Max Torque Nm.
BS M3	M3	1.6	4.58	3.0	3.7	3.8	3.1	0.45
BS M4	M4	1.6	5.74	4.2	4.8	5.1	4.1	1.60
BS M5	M5	1.6	6.60	5.0	5.8	5.3	5.1	2.10
BS M3	M3	1.6	4.58	3.0	3.7	3.8	3.1	0.45
BS M4	M4	1.6	5.74	4.2	4.8	5.1	4.1	1.60
BS M5	M5	1.6	6.60	5.0	5.8	5.3	5.1	2.10

Legend	
*	Usually Available from Stock
**	Non-preferred (Possible Lead Times)
***	Special Order Only

Part	6	8	10	12	15	18
BS M3	**	*	*	*	*	**
BS M4	**	**	*	*	*	**
BS M5	**	**	**	*	*	**


Broaching Standoffs are for use in Circuit boards or thin sheet materials softer than RB-65. The broaching action during installation creates excellent retention in the board giving a secure mounting for components & hardware. Various lengths are available so boards can be stacked at the required distance. Non threaded versions are also available if preferred. Materials & Finishes Phosphor Bronze Electro Tin (Code ET) 303 Stainless Steel (Code SS)  
 To Specify use Series No / Part No. / Length / Finish Code (eg 30313 BSM312 ET)

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**



Continued from previous page...

Series: 30313 Type: BS

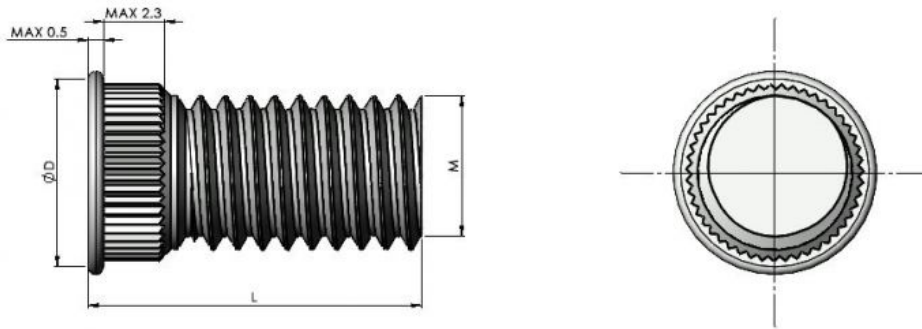

## Length Options

---

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**