




Series: 40106 Type: UNUT1

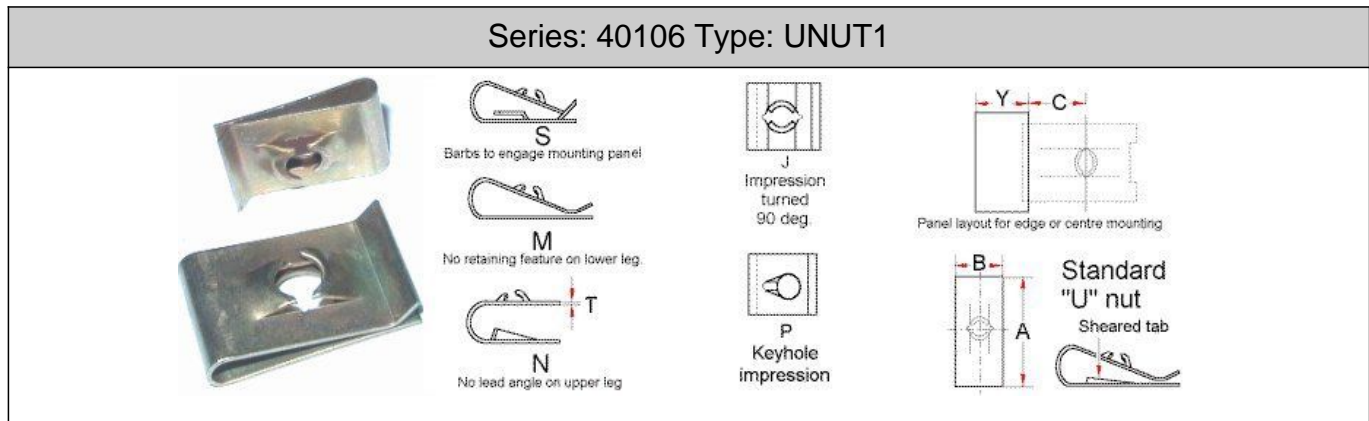

U Nuts

Part No.	Screw Gauge	Panel Range	Length A	Width B	Hole Centre C	Hole Diam	Thickness T	Cut out Size Y	Design Style
1218	M4 x 0.7	0.71/1.62	16.5	11.2	6.73	5.97	0.41	6.1	Std
3634	M5 x 0.8	0.79/1.73	17.5	11.9	8	8	0.46	5.08	P
3682	M6 x 1.0	0.91/2.64	21.1	14	10.29	10	0.56	10.16	P
1812	NO 4 AB	0.71/1.22	11.2	7.9	4.77	4.77	0.51	5.54	Std
1219	NO 6 AB	0.71/1.63	16.5	11.2	6.73	5.94	0.56	6.1	Std
2811	NO 6 AB	0.91/1.22	11.7	7.9	5.54	5.21	0.56	5.71	P
3374	NO 6 AB	0.91/1.22	11.7	7.9	5.54	5.21	0.56	5.71	PS
3129	NO 6 AB	2.16/2.41	12.4	11.2	6.15	5.54	0.56	7.11	N
1864	NO 8 AB	0.56/1.02	14	12.7	5.54	7.14	0.61	6.35	X
1686	NO 8 AB	1.22/1.63	14	12.7	5.54	7.14	0.61	7.14	X
0536	NO 8 AB	0.71/1.63	16.5	11.2	6.73	7.14	0.61	7.62	Std
2569	NO 8 AB	2.03/2.79	16.3	11.2	6.73	7.14	0.61	7.62	Std
1907	NO 8 AB	3.17/3.56	17.3	11.2	6.73	6.35	0.61	7.92	M
1561	NO 8 AB	0.71/1.63	24.4	11.2	14.3	7.14	0.61	10.67	Std
0537	NO 10 AB	0.91/2.03	19.8	12.7	7.92	7.92	0.71	9.4	Std
3489	NO 10 AB	3.17/3.42	19.6	12.7	7.92	7.92	0.71	8.74	Std
0538	NO 12 AB	0.91/2.64	26.2	15	11.1	9.91	0.81	9.91	Std

These highly effective spring steel 'U' Nuts are lightweight easily installed low cost fasteners. They are used to provide strong thread forms for thin sheets that would otherwise be incapable of accepting a thread. Manufactured to suit a range of sheet thickness in one clip means that one part could be used for several different applications. The design is such that once engaged and tightened the clip creates a spring locking action upon the screw therefore resisting vibration and shock loads. Material: Spring Steel Finish: Oiled or Trivalent Zinc

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples