




Series: 40401 Type: POF

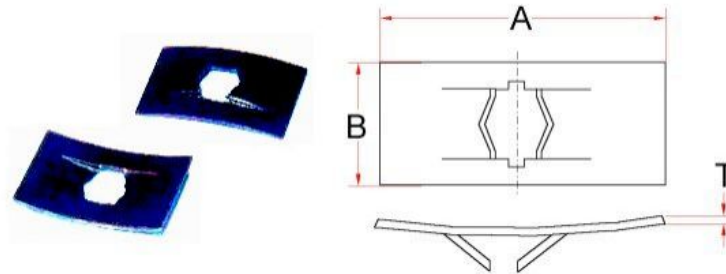

Springlok Rectangular Spring Steel Push on Fix

Part No.	Stud Diam.	Dim A	Dim. B	Dim. T	Min Protrusion
POF 2114	4.93/5.05	15.7	9.6	0.38	4.77
POF 0215	6.25/6.40	19.1	12.7	0.41	5.54
POF 0216	7.85/8.00	22.1	16.0	0.41	6.35
POF 0212	3.89/3.99	14.2	9.6	0.38	4.77
POF 0211	3.10/3.20	12.7	7.9	0.36	3.96

Rectangular Push on Fixes provide a very fast lightweight method of securing the location of a shaft or a component upon a shaft. The rectangular form gives a large load bearing area and can also provide anti rotation in some applications. Material: Spring Steel Finish: Oiled or Trivalent Zinc

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples