




Series: 50201 Type: CT

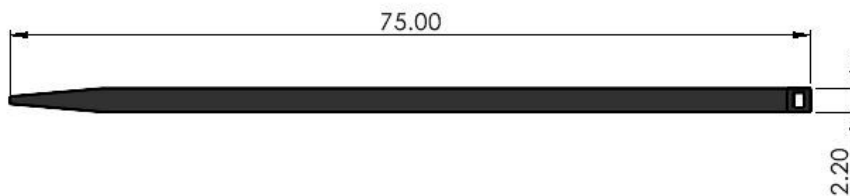


Cable Ties Natural

Part No.	Colour	Width	Length	Max. Bundle Dia	Min. Tensile kg
5201	NAT	2.2	75.0	15.0	6.0
5202	NAT	2.5	88.0	18.0	8.16
5203	NAT	2.5	98.0	21.0	8.16
5205	NAT	2.6	130.0	32.0	8.16
5206	NAT	2.5	160.0	40.0	8.16
5207	NAT	2.6	200.0	52.0	8.16
5209	NAT	3.6	140.0	35.0	13.0
5214	NAT	3.6	200.0	50.0	13.0
5210	NAT	3.6	290.0	80.0	13.0
5208	NAT	3.6	370.0	103.0	13.0
5212	NAT	4.8	120.0	24.0	20.0
5211	NAT	4.5	160.0	40.0	20.0
5213	NAT	4.8	178.0	45.0	22.0
5215	NAT	4.8	200.0	50.0	22.0
5216	NAT	4.8	250.0	68.0	22.0
5217	NAT	4.8	290.0	79.0	22.0
5219	NAT	4.8	360.0	103.0	22.0
5220	NAT	4.8	430.0	115.0	22.0
5221	NAT	7.8	120.0	25.0	55.0
5223	NAT	7.8	180.0	45.0	55.0
5225	NAT	7.8	240.0	63.0	55.0
5226	NAT	7.8	300.0	80.0	55.0
5227	NAT	7.8	365.0	100.0	55.0
5229	NAT	7.8	450.0	130.0	55.0
5231	NAT	7.8	540.0	158.0	55.0
5233	NAT	7.8	720.0	200.0	55.0
5234	NAT	9.0	780.0	233.0	77.0
5235	NAT	12.6	225.0	57.0	110.0
5237	NAT	12.6	500.0	143.0	110.0
5239	NAT	12.6	720.0	213.0	110.0



Continued from previous page...

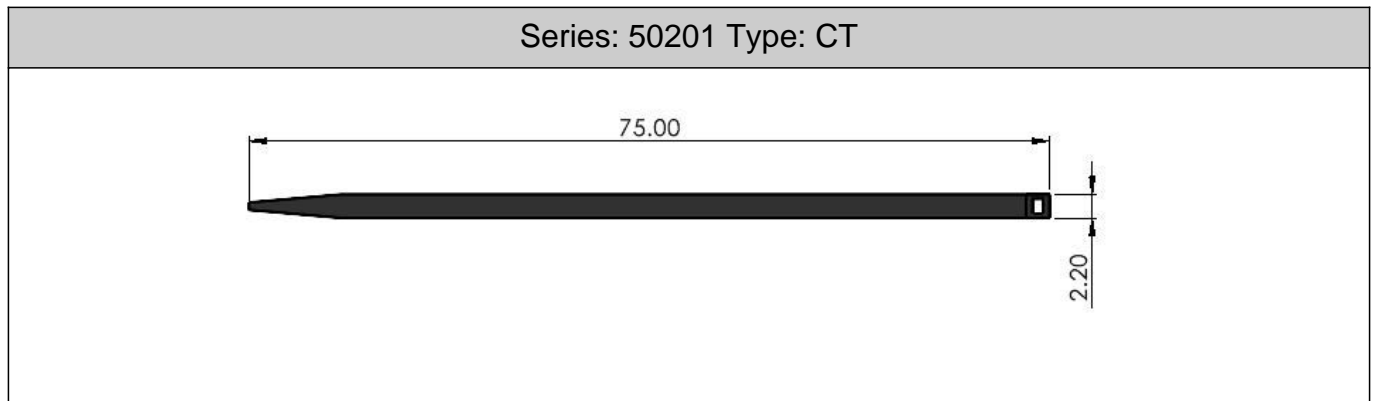

Cable Ties Natural

5241	NAT	12.6	850.0	255.0	110.0
5243	NAT	12.6	1000.0	302.0	110.0

Cable Ties are manufactured with smooth rounded edges for easy handling and safe installation. The bent, rounded tips provide easier pickup, installation and pull-up. Manufactured complete in nylon 66, there are no metal parts to fall out. Their flammability rating is to UL 94 class V2 in compliance with M.I.L. requirements S-23190 R.I.Na. Approved no. 5/206/85. Materials & Colours: Nylon 66 Black or Natural (other colours available subject to special order) To Specify use Series No/Part No (eg 50201 5207)

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples