




Series: 11503 Type: - DIN 7500C

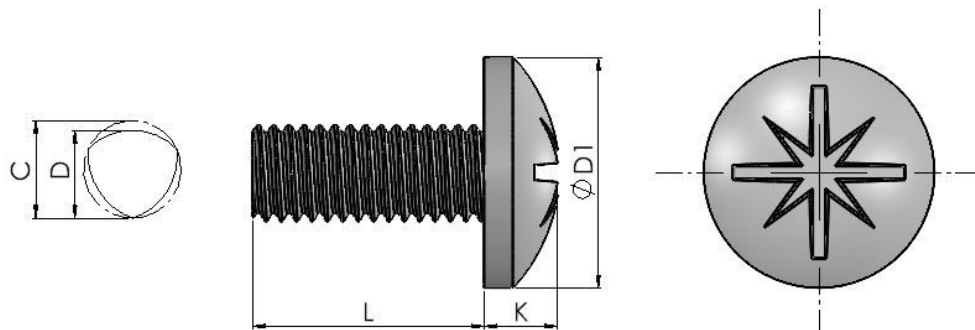

## Tap-Tight Pozi Pan Head

Part No.	Thread	D1	K	C	Recess
11503 M2**	M2	4.00	1.72	2.06	1
11503 M2.5**	M2.5	5.00	2.12	2.57	1
11503 M3**	M3	6.00	2.52	3.07	1
11503 M3.5**	M3.5	7.00	2.82	3.58	2
11503 M4**	M4	8.00	3.25	4.08	2
11503 M5**	M5	10.00	3.95	5.09	2
11503 M6**	M6	12.00	4.75	6.10	3
11503 M8**	M8	16.00	6.15	8.13	4

Legend	
*	Usually Available from Stock
**	Non-preferred (Possible Lead Times)
***	Special Order Only

Thread / Length&nbsp; ;	4	5	6	8	10	12	14	16	18	20	25	30	35	40	45	50
M2	*	*	*	*	*	***	***	***	***	***	***	***	***	***	***	***
M2.5	*	*	*	*	*	***	*	*	***	***	***	***	***	***	***	***
M3	***	*	*	*	*	*	*	*	***	*	*	*	***	***	***	***
M3.5	***	***	*	*	*	*	***	*	***	*	*	***	***	***	***	***
M4	***	***	*	*	*	*	***	*	***	*	*	*	*	*	***	***
M5	***	***	*	*	*	*	***	*	***	*	*	*	*	*	***	***
M6	***	***	***	*	*	*	***	*	***	*	*	*	*	*	***	*
M8	***	***	***	***	***	***	***	***	***	*	***	***	***	***	***	***


Thread forming screws have a trilobular thread form. These require a low level of assembly torque to initiate thread forming in sheet metal, castings and alloys. Further benefits: Screws

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**



Continued from previous page...

Series: 11503 Type: - DIN 7500C

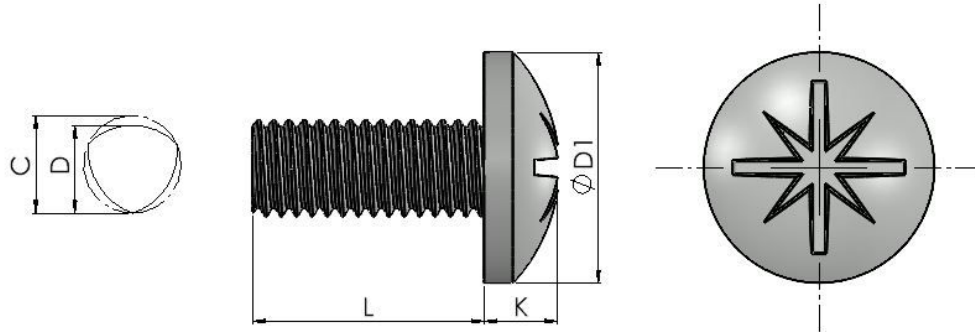

### Tap-Tight Pozi Pan Head

form a female thread capable of accepting a standard metric machine screw should the need arise. The three lobed thread design allows the displaced parent material to cold flow into the relief areas of the screw thereby increasing the resistance to vibration and loosening of the screw.

Material: Steel Finish: Zinc Plated

For the part number replace \*\* with the desired length found in the tables below:

---

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**