
Harrison Silverdale Ltd Unit 1 Traso Business Park, Callywhite Lane, Dronfield, Sheffield, S18 2XR

Tel: 01246 296 930 • Fax: 01246 296 940 Email: fasteners@harrisonsilverdale.co.uk Internet: http://www.harrisonsilverdale.co.uk



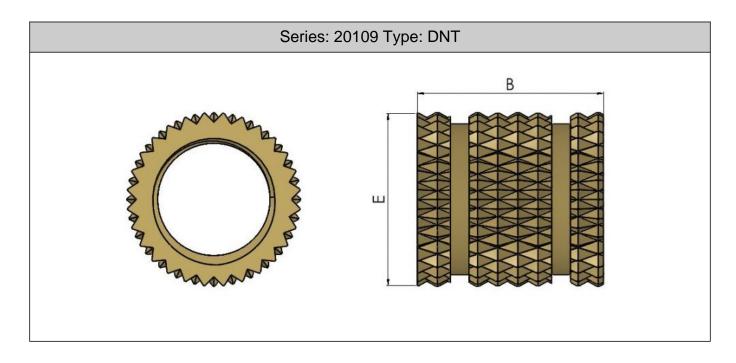

Round Mouldcert Through

Part No	Thread	E	В
DNT020H039	M2	3.4	3.92
DNT025H047	M2.5	4.15	4.72
DNT030H047	M3	4.15	4.72
DNT035H059	M3.5	5.0	5.87
DNT040H071	M4	5.9	7.12
DNT050H078	M5	6.6	7.82
DNT060H100	M6	9.25	9.92
DNT060H144	M6	9.25	14.40
DNT080H125	M8	11.5	12.47
DNT100H140	M10	13.9	13.97
DNT120H140	M12	16.3	13.97

The DNT range of inserts are designed for over moulding and can be used in all types of moulding processes. They are located on a plain pin in the mould tool and the large wall thickness allows the tool faces to clamp on either end providing a flush finish. The coarse knurl and grooves provide excellent rotational and pull out resistance.

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples