




Series: 20110 Type: PL

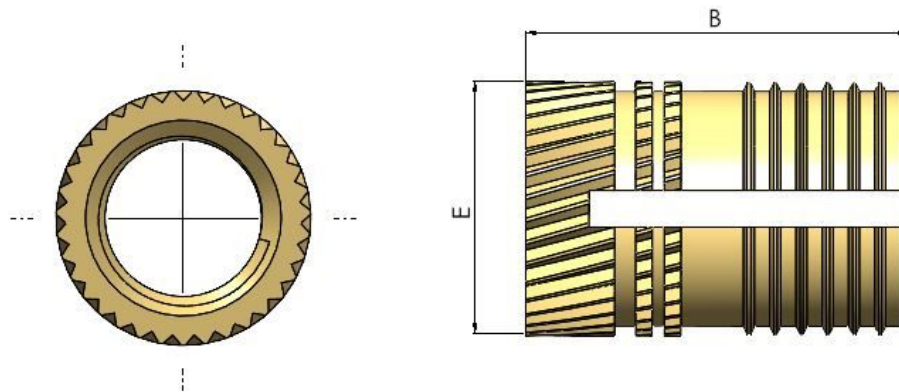

Press Fit Expansion

| Part No. | Thread | E | B | Hole +0.1 | Min Wall |
|-----------|--------|------|------|-----------|----------|
| PL020H040 | M2 | 3.7 | 4.0 | 3.2 | 1.6 |
| PL025H058 | M2.5 | 4.5 | 5.8 | 4.0 | 2.0 |
| PL030H058 | M3 | 4.5 | 5.8 | 4.0 | 2.0 |
| PL035H072 | M3.5 | 5.3 | 7.2 | 4.8 | 2.4 |
| PL040H082 | M4 | 6.2 | 8.2 | 5.6 | 2.8 |
| PL050H095 | M5 | 6.9 | 9.5 | 6.4 | 3.2 |
| PL060H127 | M6 | 8.5 | 12.7 | 8.0 | 4.0 |
| PL080H127 | M8 | 10.1 | 12.7 | 9.6 | 4.8 |

The PL range of inserts provide a thread locking feature as the screw expands the insert although this does increase the driving torque of the screw. The knurled body provides high torque and pull out performance. They should be installed using a squeezing action to avoid damaging the boss and the screw must pass through the insert to ensure maximum expansion.

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples