
Tel: 01246 296 930 • Fax: 01246 296 940 Email: fasteners@harrisonsilverdale.co.uk Internet: http://www.harrisonsilverdale.co.uk



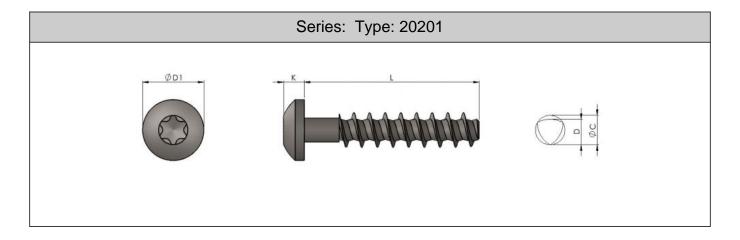

## Plas-Tight 45° Torx Pan Head

| Part No.   | Thread | D1   | K    | С    | Recess |  |
|------------|--------|------|------|------|--------|--|
| 20201 25** | 2.5    | 4.00 | 1.60 | 2.55 | 1      |  |
| 20201 30** | 3      | 5.00 | 1.95 | 3.05 | 1      |  |
| 20201 35** | 3.5    | 6.00 | 2.30 | 3.55 | 1      |  |
| 20201 40** | 4      | 7.00 | 2.45 | 4.06 | 2      |  |
| 20201 50** | 5      | 8.00 | 2.80 | 5.06 | 2      |  |

|     | Legend                              |
|-----|-------------------------------------|
| *   | Usually Available from Stock        |
| **  | Non-preferred (Possible Lead Times) |
| *** | Special Order Only                  |

| Thread/Length | 4   | 5   | 6   | 7   | 8   | 10  | 12  | 16  | 20  | 25  | 30  | 35  |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2.5           | *** | *** | *   | *** | *   | *** | *** | *** | *** | *** | *** | *** |
| 3             | *** | *** | *   | *** | *   | *   | *   | *   | *   | *** | *** | *** |
| 3.5           | *** | *** | *   | *** | *   | *   | *   | *   | *** | *   | *** | *** |
| 4             | *** | *** | *   | *** | *   | *   | *   | *   | *   | *   | *** | *** |
| 5             | *** | *** | *** | *** | *** | *   | *   | *   | *   | *   | *   | *** |

Plas-Tight 45° Screws are a Metric 3-Lobe Bodied Screw that encompass a 45º thread profile which allows deep thread penetration into the plastic material. The 3-lobe body allows displaced material to cold flow back into relief areas which minimises radial stress and reduces the possibility of failure.

Material: Steel, Stainless Steel A2 (Selected Sizes Only)

Finish: Zinc Plated, Self Colour

For the part number replace \*\* with the required length found in the tables below: