




Series: 30260 Type: TPLB

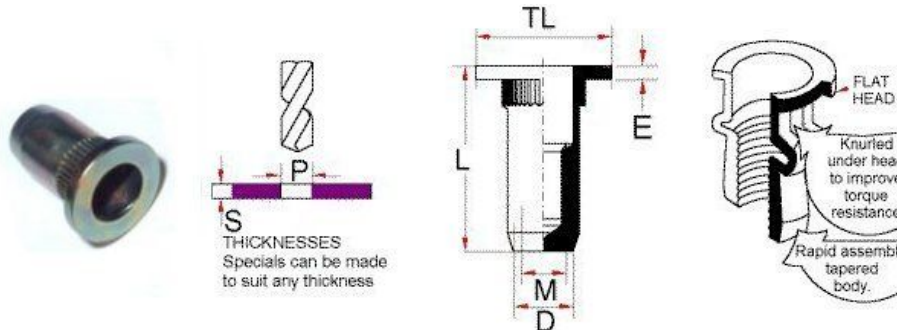

Large Flange Head Closed Rivet Nuts


Part No.	Thread M	Panel Size S	Body Diam. D	Head Dim. E	Head Diam. TL	Length L	Hole size P
3 TPLB 15	M3	0.5 - 1.5	5.0	0.8	8.0	12.0	5.1
3 TPLB 25	M3	1.5 - 2.5	5.0	0.8	8.0	13.0	5.1
3 TPLB 35	M3	2.5 - 3.5	5.0	0.8	8.0	14.0	5.1
4 TPLB 15	M4	0.5 - 1.5	6.0	0.8	10.0	14.0	6.1
4 TPLB 30	M4	1.5 - 3.0	6.0	0.8	10.0	14.0	6.1
4 TPLB 40	M4	3.0 - 4.0	6.0	0.8	10.0	15.0	6.1
5 TPLB 15	M5	0.5 - 1.5	7.0	1.0	11.0	17.0	7.1
5 TPLB 30	M5	1.5 - 3.0	7.0	1.0	11.0	18.0	7.1
5 TPLB 45	M5	3.0 - 4.5	7.0	1.0	11.0	20.0	7.1
6 TPLB 20	M6	1.0 - 2.0	9.0	1.5	13.0	20.5	9.1
6 TPLB 35	M6	2.0 - 3.5	9.0	1.5	13.0	22.0	9.1
6 TPLB 50	M6	3.5 - 5.0	9.0	1.5	13.0	23.5	9.1
8 TPLB 25	M8	1.0 - 2.5	11.0	1.5	16.0	22.3	11.1
8 TPLB 40	M8	2.5 - 4.0	11.0	1.5	16.0	23.8	11.1
8 TPLB 55	M8	4.0 - 5.5	11.0	1.5	16.0	25.3	11.1
10 TPLB 25	M10	1.0 - 2.5	13.0	1.5	19.0	26.0	13.1
10 TPLB 40	M10	2.5 - 4.0	13.0	1.5	19.0	27.5	13.1
10 TPLB 55	M10	3.0 - 5.5	13.0	1.5	19.0	29.0	13.1
12 TPLB 30	M12	1.5 - 3.0	16.0	2.0	23.0	34.0	16.1
12 TPLB 45	M12	3.0 - 4.5	16.0	2.0	23.0	35.5	16.1
12 TPLB 55	M12	4.5 - 6.0	16.0	2.0	23.0	37.0	16.1
14 TPLB 30	M14	1.5 - 3.0	18.0	2.0	25.0	41.0	18.1
14 TPLB 45	M14	3.0 - 4.5	18.0	2.0	25.0	42.5	18.1
14 TPLB 60	M14	4.5 - 6.0	18.0	2.0	25.0	44.0	18.1
16 TPLB 45	M16	3.0 - 4.5	21.0	2.5	28.0	47.0	21.1
16 TPLB 60	M16	4.5 - 6.0	21.0	2.5	28.0	48.5	21.1
16 TPLB 80	M16	6.0 - 8.0	21.0	2.5	28.0	50.0	21.1

These rivet nuts are a high performance part for demanding applications. The TPLB range

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples



Continued from previous page...

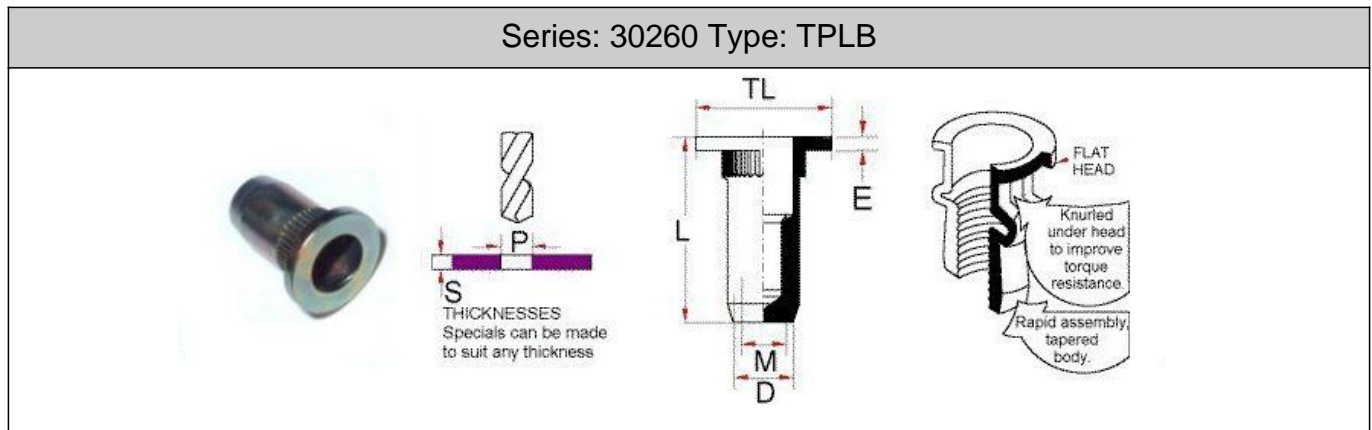

have closed or blind ends with a large flange head. They are machined from bar rather than forged and have a ribbed wall for maximum torque resistance. Material: Mild Steel or 303 Stainless Steel (code SS) Finish: Trivalent Zinc

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples